

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 August 2002 (08.08.2002)

PCT

(10) International Publication Number
WO 02/061968 A1

(51) International Patent Classification⁷: **H04B 7/005**

(21) International Application Number: **PCT/SE02/00048**

(22) International Filing Date: **11 January 2002 (11.01.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
09/774,563 1 February 2001 (01.02.2001) US
09/899,242 6 July 2001 (06.07.2001) US

(71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).**

(72) Inventors: **FURUSKÄR, Anders; Vanadisvägen 8, S-113 46 Stockholm (SE). ALMGREN, Magnus; Viktoriavägen 1, S-191 43 Sollentuna (SE). JOHANSSON, Christer; Framnäsbacken 18, S-171 66 solna (SE). DE BRUIN, Peter; Persvägen 14, S-954 31 Gammelstad (SE). SIMONSSON, Arne; Sandåkersvägen 25, S-954 33 Gammelstad (SE).**

(74) Agent: **GULLSTRAND, Malin; Ericsson Radio Systems AB, Patent Unit Research, S-164 80 Stockholm (SE).**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **METHOD AND APPARATUS FOR CONTROLLING QUALITY OF SERVICE FOR MULTIPLE SERVICES THROUGH POWER SETTING**

(57) Abstract: A method and apparatus provides for control of the quality of service for service groups by controlling the power of each service group. The carrier-to-interference requirements for which each service group achieves its minimum acceptable link quality is determined. The difference in carrier-to-interference requirements due to different requirements of fractions of satisfied users is compensated for. A power offset between the service group is determined using the compensated carrier-to-interference requirements.

-1-

METHOD AND APPARATUS FOR CONTROLLING QUALITY OF SERVICE FOR MULTIPLE SERVICES THROUGH POWER SETTING

BACKGROUND

5 The present invention relates to quality of service control in networks, and more specifically, to controlling quality of service for multiple services in a radio network through service group power setting.

Due to the rising popularity of data services such as the Internet, there has been an increased demand for various types of access to these data services. To
10 address this increased demand for access to data services, operators of radio networks have implemented techniques for communication of data through the radio networks. Many portions of the conventional radio networks are reused for these data services. Accordingly, the radio network's air interface resources are shared between the voice and data services. It will be recognized that, depending
15 on the radio access technique, a resource consists of a set of logical or physical channels, (e.g., frequencies for FDMA, timeslots for TDMA, or spreading codes for CDMA), together with a constraint on maximum power or energy for use on these logical or physical channels. When managing the common resource for multiple services in a radio network, bearers of different services having different
20 requirements on channel availability and channel quality, stemming from, e.g., co-channel interference from other cells, should be accounted for.

P. Stuckman et al. "GPRS Radio Network Capacity and Quality of Service Using Fixed and On-Demand Channel Allocation", in proc IEEE VTC'00 Spring, which is herein expressly incorporated by reference, discloses one conventional
25 method for managing different services in a radio network by dividing the common resource set into smaller isolated parts. Each of these smaller isolated parts are reserved specifically for one service group. Accordingly, channel availability per service group can be controlled through the amount of resources allocated to a

-2-

particular subset. Channel quality may also be controlled if the resources are arranged such that the same subset allocation is used in all cells in the radio network. Using the same subset allocation in all of the cells in a radio network avoids interference between more aggressive and less aggressive service groups because equally aggressive services will be allocated on the same co-channels in neighboring cells. However, dividing the common resource set into smaller isolated parts results in trunking losses due to the fact that the fewer resources that are pooled together, the less effective each individual resource becomes. Dividing the common resource set requires service mix dependent dimensioning which is difficult to determine prior the division of the common resource set.

One method for managing a common resource for multiple services which avoids the above-identified trunking losses, is to mix services on this same resource. When services are mixed on the same resource, channel availability may be controlled through priority schemes, e.g., assigning blocking sensitive voice services priority over less delay-sensitive data services. For more information on mixing services on the same resource the interested reader should refer to G. Bianchi et al., "Packet Data Services Over GSM Networks With Dynamic Stealing Of Voice Channels", Proceedings of IEEE GLOBECOM 1995, which is herein expressly incorporated by reference. Because different services typically have different channel quality requirements there are many deficiencies with mixing services on the same resource. For example, when different services are mixed on the same resource the average interference situation on the shared channels is the same regardless of service type. Accordingly, without first accounting for this interference situation, mixing different services on the same resource does not account for the different channel quality requirements of different services.

One method for adjusting the allocation of resources for different quality requirements can be achieved through individual power control. Individual power control is currently used in most direct sequence-CDMA (DS-CDMA) systems,

-3-

e.g., wide band CDMA (WCDMA), IS-95 or CDMA-2000, as well as TDMA-based systems, e.g., GSM/EDGE systems. In general, individual power control is used to control the power at which individual mobiles or base stations transmit in order to minimize mutual interference between the mobiles or base stations. Since
5 an increase in transmit power for one mobile or base station increases interference to other mobiles or base stations within radio range, this increased transmit power can be considered as increasing the radio resources allocated to the mobile or base station, while the increased interference decreases the radio resources allocated to the other mobiles or base stations. The intent of individual power control is to
10 limit a mobile or base station to transmitting at a minimum power level required to respectively reach a base station or mobile station, with a desired signal strength or quality. For more information on how individual power control can be used as a component to manage multiple services, the interested reader should refer to D. Imbeni et al., "Quality of Service Management for Mixed Service in WCDMA",
15 in proc IEEE VTC'00 Fall, which is herein expressly incorporated by reference.

One problem with individual power control in GPRS/EGPRS systems is that the amount of individual power control is limited by current standards. Further, in combination with the limited power control provided by the standards, the short duration of data packets for the power control algorithms to converge
20 within renders channel qualities difficult to control through power control. In addition, since these individual power control schemes dynamically regulate power individually for each user to achieve a given link quality target, an increased amount of signaling in the network is required.

Accordingly, it would be desirable to control the quality of service for
25 multiple services that share a common resource without trunking losses and service mix dependent dimensioning. Further, it would be desirable to provide different quality requirements for different services. In addition, it would be desirable to control the interference between service groups to maximize capacity without the increased complexity of individual power control.

-4-

SUMMARY

A method and apparatus provides for control of the quality of service for service groups by controlling the power of a set of users using a common service, which can be referred to as a service group. The quality of service to be provided to each service group is determined. The carrier-to-interference ratio requirements for which each service group meets the minimum acceptable quality of service is determined. A power offset between the service groups is determined using the determined carrier-to-interference ratios. In accordance with further embodiments of the present invention the carrier-to-interference level at which the required percentage of users of each service group achieve the minimum acceptable quality of service level is compensated for. The power offset between the groups is determined using the compensated carrier-to-interference levels. In accordance with one aspect of the present invention, the allocation of radio resources can include admission/load control based on the total amount of radio resources allocated either per base station or for a group of base stations.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects and advantages of the invention will be understood by reading the following detailed description in conjunction with the drawings, in which:

Figure 1 illustrates the service group quality versus the aggregate load for a certain service group mix;

Figure 2 illustrates an exemplary method for achieving service-based power setting in accordance with the present invention;

Figure 3A illustrates the bearer quality versus link quality for an exemplary EGPRS interactive data bearer in accordance with exemplary embodiments of the present invention;

-5-

Figure 3B illustrates the bearer quality versus link quality for the MR59 and EFR voice bearers in accordance with exemplary embodiments of the present invention;

Figure 4 illustrates a chart used for determining the power offset between voice and interactive data bearers; and

Figure 5 illustrates the joint voice and interactive data capacity for different mixes of voice and data traffic in a GSM/EDGE system.

DETAILED DESCRIPTION

The various features of the invention will now be described with reference to the figures, in which like parts are identified with the same reference characters.

In the following description, for purposes of explanation and not limitation, specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well known methods, devices, and circuits are omitted so as not to obscure the description of the present invention.

According to exemplary embodiments of the present invention, to maximize capacity for a mix of service groups, service-based power control is implemented. Specifically, the present invention uses a static, or semi-static, power offset, or attenuation, between bearer service groups which is applied to either the fixed, maximum or initial power levels for all transmissions associated with a particular service group.

In accordance with exemplary embodiments of the present invention, in a multiple service group environment capacity for the service group mix can be maximized by reallocation of resources from service groups with an excess quality to service groups which are barely achieving their quality requirements. Figure 1 illustrates the service group quality versus the aggregate load for a certain service

-6-

group mix. Assume that capacity for a certain service mix in multiple service systems is the maximum aggregate load for which all services' quality requirements are sustained. Aggregate load may, e.g., be defined as the total number of users together with the fractions of users of the different services, i.e.,
5 the service mix.

Service quality requirements may be expressed in two steps: first as a service group quality measure, e.g., in terms of a certain fraction of satisfied users of a service; and second as individual user quality, often simply denoted Quality-of-Service (QoS), e.g., in terms of a certain minimum voice quality or exceeding a
10 certain data-rate. As illustrated in figure 1, the aggregate load (A0) at which the group quality for the first, i.e., worst or most sensitive, service (Service A) fails to meet its quality requirements limits the capacity (Cap 0) for this service mix. The fact that the second service group (Service B) may maintain acceptable quality for a higher load (B0) does not address this capacity limit for the service mix. Nor
15 does the fact that the second service group, at the capacity limit, experiences a better quality than required.

The way to improve the system capacity in this case is thus to improve the performance for the most sensitive service (Service A). This may be done on behalf of the available radio resource for the service group with excessive quality
20 (Service B). The effect of this resource balancing is depicted by arrows moving the quality vs. load curves upwards for service A and downwards for service B. The curves are moved until the quality requirements are simultaneously reached for the first and second service groups. As illustrated in figure 1, the quality requirements for the first and second service groups are simultaneously achieved
25 when both service groups just meet their quality requirements, i.e., at Cap 1= $\min(A1, B1)$. Any deviation from this capacity would cause either of the curves to move downwards-left, and thereby limit the capacity to a lower value than Cap 1.

-7-

The techniques described above can be extended to situation with more than two service groups. For example, initially resources from the set of services with excessive quality are allocated to the most sensitive service. The system capacity can be improved using this technique until another service becomes the limiting one. Then this new limiting service is allocated resources from the set with excessive quality. This process can be repeated until no service has excessive quality and all services will just barely meet their corresponding requirements. At this point the system capacity is maximized.

Hence, managing radio resources so that all service groups simultaneously reach their quality requirements maximizes system capacity. Note that the limiting services may well differ with the service mix and thus require service mix-adaptive management schemes.

In accordance with exemplary embodiments of the present invention, the allocation of radio resources between service groups is achieved through per bearer service-based power setting for each service group. The difference in link quality for each bearer of each service group is based upon the output power allocated to each service group. Figure 2 illustrates an exemplary method for achieving service-based power setting in accordance with the present invention. Initially, the quality of service requirements for each of the different bearer services, i.e., service groups, is selected (step 210). The carrier-to-interference requirements for which each service group achieves its minimum acceptable link quality is determined (step 220).

It will be recognized that most telecommunication systems are not designed to provide all of the users with an acceptable link quality all of the time. Instead, many telecommunications systems consider it acceptable if only a certain percentage of the total number of users, e.g., 95%, achieve an acceptable link quality. Further, this fraction may differ between services. If the fractions differ between services the power requirements for each service group is compensated, using an expected carrier-to-interference distribution, to account for the fractions

-8-

of satisfied users for the telecommunication system (step 230). The power differences between service groups is then determined as a sum of the difference in carrier-to-interference requirements and the difference in carrier-to-interference requirements due to different fractions (percentages) of satisfied users (step 240).

5 The power offset can be applied to a fixed power per bearer for a service group. Alternatively, if the system implements individual power control, the power offset can be applied to an initial power or a maximum power per bearer for a service group. In accordance with exemplary embodiments of the present invention, the power offsets determined using the method described above in connection with
10 figure 2 can be repeatedly updated based upon estimates or measurements of the quality for the different service groups.

It will be recognized that at least steps 220 and 230 of figure 2 could be automated. In case of Step 220 this could be automated by a system which adaptively tracks what channel qualities are required for a certain service quality
15 (e.g., through maintaining a table with the information of Figures 3A and 3B). In case of step 230, the quality, e.g., carrier-to-interference, difference between different fractions of the user population could be measured and based on this measurement the associated offset adapted.

Also, certain systems may be able to directly measure user quality, and
20 thereby also the fraction of satisfied users of each service group. Such systems could directly adjust power offsets to reach the desired balance between service groups, and hence maximize capacity. Note also that the power offsets applied may differ between different regions of a network, e.g. between cells.

Now that the general operation of the present invention has been provided,
25 an exemplary implementation of the present invention in a GSM/EDGE radio access network (GERAN) is provided to highlight the advantageous characteristics thereof. Figure 3A illustrates the bearer quality versus link quality for an exemplary EGPRS interactive data bearer. Assume that the interactive data requirement is 10 kpbs per timeslot to achieve a minimum acceptable QoS.

-9-

Referring to figure 3A, this requirement is met with an average carrier-to-interference ratio of 5 dB.

Figure 3B illustrates the bearer quality versus link quality for the GERAN voice bearer: Multi rate 5.9 kbps (MR59) and Enhanced Full Rate (EFR). Assume
5 that the voice bearer requirement of an EFR voice bearer is a 1 % frame error rate (FER) to achieve a minimum acceptable QoS. As illustrated in figure 3B, this requirement is met with an average carrier-to-interference ratio of 8 dB. Accordingly, a system which mixes EGPRS interactive data bearers and EFR voice bearers would use a power offset of 3 dB, i.e., 8 dB for the EFR voice
10 bearers minus 5 dB for the EGPRS interactive data bearers. Accordingly, a system which implements the present invention would set the power for the EGPRS interactive data bearers 3 dB below the power used for the EFR voice bearers.

Assume now that a system provides a service mix of MR59 voice bearers
15 and EGPRS data bearers. Further assume that the voice bearer quality of the MR59 voice bearers is 0.6% FER. Referring now to figure 3B, this FER is achieved at an average carrier-to-interference ratio of 4 dB. Accordingly, the system which provides a service mix of MR59 voice bearers and EGPRS data bearers would set the EGPRS interactive data bearers 1 dB above the power used
20 for MR59 voice bearers, i.e., 4 dB for MR59 voice bearers minus 5 dB for the EGPRS interactive data bearers.

It should be noted that the techniques described above can also be applied to control quality for bearers of the same service type but with different quality requirements. Assume, for example, that two different interactive data service
25 groups are to be statistically, e.g., based on a certain percentile of users, provided with 10 kbps and 20 kbps, respectively. According to figure 3A, for achieving the desired system behavior, a power offset between the bearers of the two groups should be 4 dB, i.e., 9 dB - 5 dB, should be implemented between the two service groups wherein the higher power is used for the 20 kbps service group. Another

-10-

example may be two different voice service groups, a first with MR59 bearers and a required FER of 0.6% and a second with EFR bearers and a required FER of 1.0%. In this case the power offset of 4 dB, i.e., 8 dB - 4 dB, should be used to achieve the desired system behavior wherein the higher power is used for the EFR bearers.

Figure 4 illustrates a chart used for determining the power offset between voice and interactive data bearers. The first column is a measure of the voice quality and carrier-to-interference requirement for EFR and MR59 voice bearers. The second column is a measure of the interactive data quality per timeslot and carrier-to-interference requirements for an EGPRS data bearer. The third column is a measure of the difference in power between 95% satisfied users and 90% satisfied users, i.e., the 5th - 10th percentile difference. The fourth column contains a calculation of the required power offset in a system which mixes EFR voice bearers and EGPRS data bearers or MR59 voice bearers and EGPRS data bearers when the EGPRS data bearers only require 90% of the users to achieve an acceptable minimum level of quality of service.

It will be recognized that the 5th - 10th percentile difference can be estimated using typical or expected interference distributions. For example, in a 1/3 or 3/9 reuse system without power control the difference between the 5th and 10th percentile of carrier-to-interference ratio is approximately 3 dB. This difference can also be derived with statistical functions if the distribution is known. For example, if the carrier-to-interference is normal distributed the standard deviation by itself defines the differences between any percentile values. It is then only necessary to estimate or measure the carrier-to-interference standard deviation, i.e., (standard deviation*X1) - (standard deviation*X2), wherein X1 and X2 are respectively the higher and lower percentiles. For example, with a standard deviation of 10 dB, the difference between 5th percentile and 10th percentile $(10*1.64)-(10*1.28)=3.6$ dB, and between 1st and 20th percentile $(10*2.33)-(10*0.84)=14.9$ dB. The values $X = 1.64, 1.28$ and 0.84 respectively are

-11-

achieved from the inverse normal distribution function for $f_i(X) = 0.95$ (5th percentile), 0.9 (10th percentile), 0.99 (1st percentile) and 0.8 (20th percentile).

Figure 5 illustrates the joint voice and interactive data capacity for different mixes of voice and data traffic in a GSM/EDGE system. For each service group mix, the capacity is evaluated in a manner similar to that described above in connection with figure 1 and is represented in figure 5 by a point on one curve marked with an 'o'. The areas below the curves in figure 5 correspond to feasible loads for all traffic mixes for voice and data traffic. Specifically, figure 5 illustrates the capacity using isolated bearers, Iso, and for bearers with a 0 dB, 3 dB, 6 dB and 9 dB power offset in accordance with the present invention. As can be seen from figure 5, a power offset of 6 dB provides the greatest capacity for the voice and data service mix. As also illustrated in figure 5, the 6 dB offset in accordance with the present invention provides a greater capacity for the voice and data service group mix than using isolated bearers.

It should be recognized that the example described above is intended to be illustrative of the implementation of the present invention in one type of system and is not intended to limit the application of the present invention. For example, the present invention can also be used when a streaming bearer is transmitted in the service group mix. In addition, power offsets can be determined in a system where more than two different bearers are used in a service group mix. It should also be recognized that the present invention is not intended to replace individual power control used in radio systems. Instead the present invention can be used to complement these individual power control schemes to achieve a maximum aggregate load for certain service mix.

In accordance with further embodiments of the present invention, per bearer service group power control can be complemented by other resource allocation techniques. For example, per bearer service group power control can be used in connection with resource scheduling and/or channel allocation schemes.

-12-

One such resource scheduling scheme is admission/load control.

Admission/load control schemes are designed to balance the load on the radio communication system versus the interference caused by communications between mobiles and base stations in the system. Conventional admission/load control schemes strike this balance based upon a predetermined number of users.

However, depending upon the amount of power used by communications between base stations and mobile stations, the number of users may not be an accurate measure of the amount of interference in the radio communication system. In

accordance with one aspect of the present invention, the total output power of the

users who have been admitted to communicate with the radio communication system is measured to determine whether there is sufficient capacity to admit a new user into the radio communication system. The same principle can also be applied to determine if dropping of users from the system is necessary. Further, a different threshold can be employed for determining whether to admit new users

then for determining whether to drop users. Since different power levels are employed in a radio communication system in accordance with the present invention, employing admission control based upon the total amount of power employed by the radio communication system provides a more accurate measure of the total interference compared to based upon the number of admitted users. The

admission control/load control scheme in accordance with one aspect of the present invention can allow admitting users until the total power per base station exceeds a certain limit. In accordance with another aspect of the present invention, a

measure of the interference can be based upon the total amount of power of a set of base stations. Although the admission control example described above uses

total output power to make admission decisions, the present invention can also employ other functions of the admitted users' powers such as a sum of the powers or a weighted sum of the powers with service dependent weights.

Although exemplary embodiments of the present invention have been described above as compensating for a percentage of satisfied users, the present

-13-

invention can be implemented to compensate for any statistical function of user quality within a service group. Further, although exemplary embodiments of the present invention have been described wherein carrier-to-interference is used as a measurement of QoS, the present invention can be implemented using other types
5 of measurements of radio channel quality, e.g., Bit Error Probability (BEP), Bit Error Rate (BER), Frame Erasure Rate (FER), Block Error Rate (BLER), etc.

The invention has been described herein with reference to particular embodiments. However, it will be readily apparent to those skilled in the art that it may be possible to embody the invention in specific forms other than those
10 described above. This may be done without departing from the spirit of the invention. Embodiments described above are merely illustrative and should not be considered restrictive in any way. The scope of the invention is given by the appended claims, rather than the preceding description, and all variations and equivalents which fall within the range of the claims are intended to be embraced
15 therein.

-14-

WHAT IS CLAIMED IS:

1. A method for allocating radio resources in a radio communication system comprising the steps of:
 - selecting a service quality requirement for a first service group and a
5 second service group;
 - determining an amount of radio resources for the first and second service groups to achieve the respective service quality requirement; and
 - allocating the radio resources between the first and second service groups
based on a difference between the determined amount of radio resources, wherein
10 the radio resources are allocated per bearer within the first and second service groups.
2. The method of claim 1, wherein the determined amount of radio resources is a relative amount of radio resources between the first and second service groups.
- 15 3. The method of claim 1, wherein the determined amount of radio resources is an absolute amount of radio resources for the first and second service groups.

-15-

4. The method of claim 1, wherein said service quality is a function of user quality, within the service group.

5. The method of claim 4, further comprising the step of:
compensating the amount of radio resources for the first and second service
5 groups based upon a percentage of users of the first and second service groups
which is desired to achieve the quality of service requirement,
wherein the radio resources are allocated based upon the compensated
amount of radio resource.

6. The method of claim 4, wherein the quality of service requirements
10 is measured or estimated by carrier-to-interference ratios, bit error probability, bit
error rate, frame erasure rate or block error rate.

7. The method of claim 5, wherein the compensation is based on the
carrier-to-interference ratio standard deviation.

8. The method of claim 1, wherein the amount of radio resources is
15 based on a power level used for the first and second service groups and the
difference between the determined amount of radio resources is a difference in
power between the first and second service groups.

-16-

9. The method of claim 8, wherein the difference in power between the first and second service groups is applied to a fixed output power of the first service group.

10. The method of claim 8, wherein the difference in power between
5 the first and second service groups is applied to a maximum power for the first service group.

11. The method of claim 8, wherein the difference in power between the first and second service groups is applied to an initial power for the first service group.

10 12. The method of claim 8, wherein the difference in power between the first and second service groups is applied to a fixed power, a maximum power and an initial power for the first service group.

13. The method of claim 8, further comprising the step of:
adjusting the power for individual users of a service group using individual
15 power control loops.

14. The method of claim 8, wherein the amount of radio resource is further based on the number of channels allocated to the first and second service group.

-17-

15. The method of claim 8, wherein the amount of radio resource is further based on the scheduling to the first and second service group such that the amount of channel used by each service group is controlled by the scheduling:

16. The method of claim 8, wherein the step of allocating the radio
5 resources further comprises the steps of:
calculating a sum of the total power for all users in the radio
communication system; and
admitting new users to the radio communication system if the sum is less
than a predetermined threshold.

10 17. The method of claim 16, further comprising the step of:
dropping users from the radio communication system if the sum is greater than
another predetermined threshold, wherein the radio communication system
includes at least two base stations.

18. The method of claim 8, wherein the step of allocating the radio
15 resources further comprises the steps of:
calculating a function of the power for all users in the radio communication
system; and admitting new users to the radio communication system if the
calculated function is less than a predetermined threshold.

19. The method of claim 18, further comprising the step of: dropping
20 users from the radio communication system if the calculated function is greater

-18-

than another predetermined threshold, wherein the radio communication system includes at least two base stations.

20. The method of claim 8, wherein the step of allocating the radio resources further comprises the steps of:

5 calculating a weighted sum of the power for all users in the radio communication system; and

admitting new users to the radio communication system if the weighted sum is less than a predetermined threshold.

21. The method of claim 20, further comprising the step of:

10 dropping users from the radio communication system if the weighted sum is greater than another predetermined threshold, wherein the radio communication system includes at least two base stations.

22. The method of claim 8, wherein the radio communication system includes a base station, the step of allocating radio resources further comprises the steps of:

15 calculating a sum of the total power for all users communicating with the base station;

admitting new users to the base station if the sum is less than a predetermined threshold; and

20 dropping users from the base station if the sum is greater than the predetermined threshold.

-19-

23. The method of claim 16, wherein the radiocommunication system is a GSM/EDGE radio access network (GERAN).

24. The method of claim 1, wherein the selecting step and the determining step are continuously performed to provide an updated allocation of
5 radio resources.

25. The method of claim 5, wherein the percentage of users of the first and second service groups who can achieve the quality of service requirement is measured and the amount of radio resources is adaptively compensated for based upon the updated percentage of users of the first and second service groups.

10 26. The method of claim 1, wherein the selecting, determining and allocating steps are performed for the first service group, the second service group and a third service group.

27. A method for allocating radio resources in a radio communication system comprising the steps of:

15 selecting a service quality requirement for a first service group and a second service group;

determining an amount of radio resources for the first and second service groups to achieve the respective service quality requirement;

allocating the radio resources between the first and second service groups
20 based on a difference between the determined amount of radio resources, wherein the radio resources is an amount of power;

-20-

calculating the total amount of radio resources employed by the first and second service groups; and

allocating radio resources to a new user to the radio communication system if the total amount of radio resources is less than a predetermined threshold.

5 28. The method of claim 27 further comprising the step of:
deallocating radio resources from a user in the first or second service group if the total amount of radio resources is greater than the predetermined threshold.

29. The method of claim 27, wherein the radio communication system is a GSM/EDGE access network (GERAN).

10 30. A method of allocating radio resources for a first and second service group comprising the steps of:

determining an amount of radio resources at which the first service group can provide an minimum quality of service level;

15 determining an amount of radio resources allocated for the second service group; and

reallocating radio resources proportionally from the second service group to the first service group such that the service quality limits are simultaneously met.

-21-

31. The method of claim 30, wherein the radio resources are reallocated to maximize capacity.

32. The method of claim 30, further comprising the steps of:
determining an amount of radio resources at which a third service group
5 can provide an minimum quality of service level;
determining an amount of radio resources allocated for a third service
group; and
reallocating radio resources from the fourth service group to the third
service group such that the total load between the first, second, third and fourth
10 service groups is maximized.

33. The method of claim 30, wherein the radio resources are an output power for the first and second service groups.

34. The method of claim 33, wherein the radio resources are further a channel allocation for the first and second service groups.

15 35. The method of claim 33, wherein the output power for the first and second service groups is a per bearer output power for the first and second service groups.

36. The method of claim 33, wherein the output power is an initial power for the service group.

20 37. The method of claim 33, wherein the output power is a maximum power for the service group.

-22-

38. The method of claim 33, wherein the output power is a fixed power for the service group.

39. A method for allocating radio resources comprising the steps of:
allocating a first transmit power per bearer for a first service group; and
5 allocating a second transmit power per bearer for a second service group.

40. The method of claim 39, wherein the first and second transmit powers are allocated to a maximum or an initial output power per bearer for the first and second service groups.

41. The method of claim 39, wherein the first and second transmit
10 powers are allocated based upon a measurement of bearer quality.

42. The method of claim 39, further comprising the step of:
estimating a link quality, wherein the first and second transmit powers are
allocated based upon the estimate.

43. The method of claim 39, wherein the first and second transmit
15 powers are allocated to balance a quality of service between the first and second service groups:

44. The method of claim 39, wherein the first and second transmit powers are allocated based upon a desired fraction of satisfied users for each of the first and second service groups.

-23-

45. The method of claim 39, wherein the first and second transmit powers are repeatedly updated based upon estimates of quality for the first and second service groups.

46. The method of claim 39, wherein the first and second transmit
5 powers are repeatedly updated based upon measurements of quality for the first and second service groups.

47. A radio communication system comprising:

means for selecting a service quality requirement for a first service group and a second service group;

10 means for determining an amount of radio resources for the first and second service groups to achieve the respective service quality requirement; and

means for allocating the radio resources between the first and second service groups based on a difference between the determined amount of radio resources, wherein the radio resources are allocated per bearer within the first and
15 second service groups.

48. The system of claim 47, wherein the determined amount of radio resources is a relative amount of radio resources between the first and second service groups.

49. The system of claim 47, wherein the determined amount of radio
20 resources is an absolute amount of radio resources for the first and second service groups.

-24-

50. The system of claim 47, wherein said service quality is a function of user quality, within the service group.

51. The system of claim 50, further comprising:

means for compensating the amount of radio resources for the first and
5 second service groups based upon a percentage of users of the first and second service groups which is desired to achieve the quality of service requirement, wherein the radio resources are allocated based upon the compensated amount of radio resource.

52. The system of claim 50, wherein the quality of service requirements
10 is measured or estimated by carrier-to-interference ratios, bit error probability, bit error rate, frame erasure rate or block error rate.

53. The system of claim 51, wherein the compensation is based on the carrier-to-interference ratio standard deviation.

54. The system of claim 50, wherein the amount of radio resources is
15 based on a power level used for the first and second service groups and the difference between the determined amount of radio resources is a difference in power between the first and second service groups.

55. The system of claim 54, wherein the difference in power between the first and second service groups is applied to a fixed output power of the first
20 service group.

-25-

56. The system of claim 54, wherein the difference in power between the first and second service groups is applied to a maximum power for the first service group.

57. The system of claim 54, wherein the difference in power between
5 the first and second service groups is applied to an initial power for the first service group.

58. The system of claim 54, wherein the difference in power between the first and second service groups is applied to a fixed power, a maximum power and an initial power for the first service group.

10 59. The system of claim 54, further comprising:
means for adjusting the power for individual users of a service group using individual power control loops.

60. The system of claim 54, wherein the amount of radio resource is
further based on the number of channels allocated to the first and second service
15 group.

61. The system of claim 54, wherein the amount of radio resource is further based on the scheduling to the first and second service group such that the amount of channel used by each service group is controlled by the scheduling.

62. The system of claim 50, wherein the system provides an updated
20 allocation of radio resources using the means for selecting and means for determining.

-26-

63. The system of claim 51, wherein the percentage of users of the first and second service groups who can achieve the quality of service requirement is measured and the amount of radio resources is adaptively compensated for based upon the updated percentage of users of the first and second service groups.

5 64. The system of claim 50, wherein the means for selecting, determining and allocating operate in connection with the first service group, the second service group and a third service group.

65. A radio communication system for allocating radio resources for a first and second service group comprising:

10 means for determining an amount of radio resources at which the first service group can provide an minimum quality of service level;

 means for determining an amount of radio resources allocated for the second service group; and

 means for reallocating radio resources proportionally from the second
15 service group to the first service group such that the service quality limits are simultaneously met.

66. The system of claim 65, wherein the radio resources are reallocated to maximize capacity.

67. The system of claim 65, further comprising:

20 means for determining an amount of radio resources at which a third service group can provide an minimum quality of service level;

-27-

means for determining an amount of radio resources allocated for a third service group; and

means for reallocating radio resources from the fourth service group to the third service group such that the total load between the first, second, third and
5 fourth service groups is maximized.

68. The system of claim 65, wherein the radio resources are an output power for the first and second service groups.

69. The system of claim 68, wherein the radio resources are further a channel allocation for the first and second service groups.

10 70. The system of claim 68, wherein the output power for the first and second service groups is a per bearer output power for the first and second service groups.

71. The system of claim 68, wherein the output power is an initial power for the service group.

15 72. The system of claim 68, wherein the output power is a maximum power for the service group.

73. The system of claim 68, wherein the output power is a fixed power for the service group.

74. A radio communication system for allocating radio resources
20 comprising: means for allocating a first transmit power per bearer for a first

-28-

service group; means for allocating a second transmit power per bearer for a second service group.

75. The system of claim 74, wherein the first and second transmit powers are allocated to a maximum or an initial output power per bearer for the first and second service groups.

76. The system of claim 74, wherein the first and second transmit powers are allocated based upon a measurement of bearer quality.

77. The system of claim 74, further comprising:
means for estimating a link quality, wherein the first and second transmit powers are allocated based upon the estimate.

78. The system of claim 74, wherein the first and second transmit powers are allocated to balance a quality of service between the first and second service groups.

79. The system of claim 74, wherein the first and second transmit powers are allocated based upon a desired fraction of satisfied users for each of the first and second service groups.

80. The system of claim 74, wherein the first and second transmit powers are repeatedly updated based upon estimates of quality for the first and second service groups.

81. The system of claim 74, wherein the first and second transmit powers are repeatedly updated based upon measurements of quality for the first and second service groups.

1/3

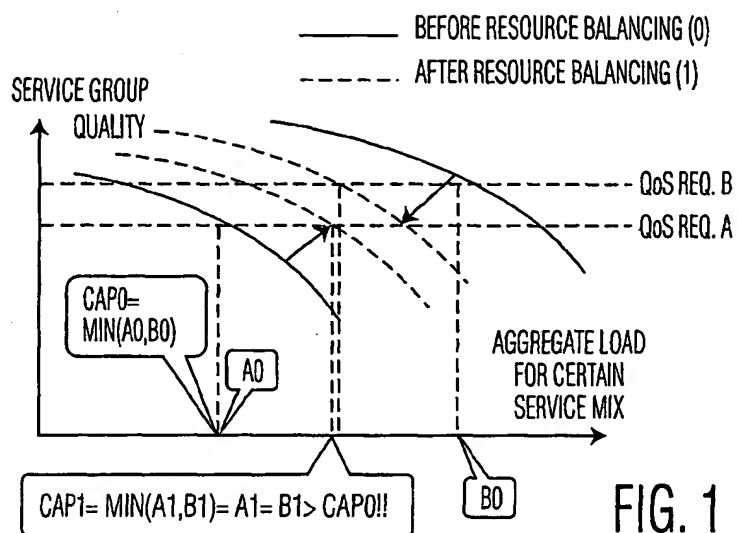


FIG. 1

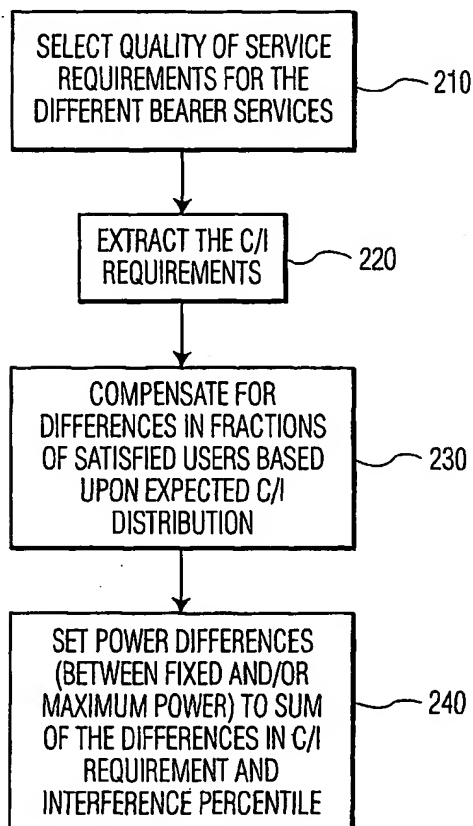


FIG. 2

2/3

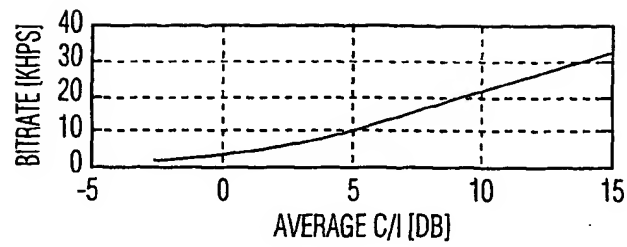


FIG. 3A

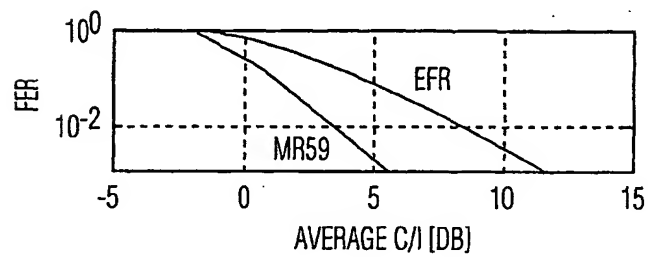


FIG. 3B

VOICE QUALITY AND C/I REQUIREMENT	INTERACTIVE DATA QUALITY (PER TS) AND C/I REQUIREMENT	5TH - 10TH PERCENTILE DIFFERENCE	POWER OFFSET
EFR 1% FER 8dB C/I	10 KBPS/5dB	3dB	8-5+3=6dB
	15 KBPS/7dB		8-7+3=4dB
	20 KBPS/9dB		8-9+3=2dB
MR59 0.6% FER 4dB C/I	10 KBPS/5dB		4-9+3=2dB
	15 KBPS/7dB		4-9+3=0dB
	20 KBPS/9dB		4-9+3=-2dB

FIG. 4

3/3

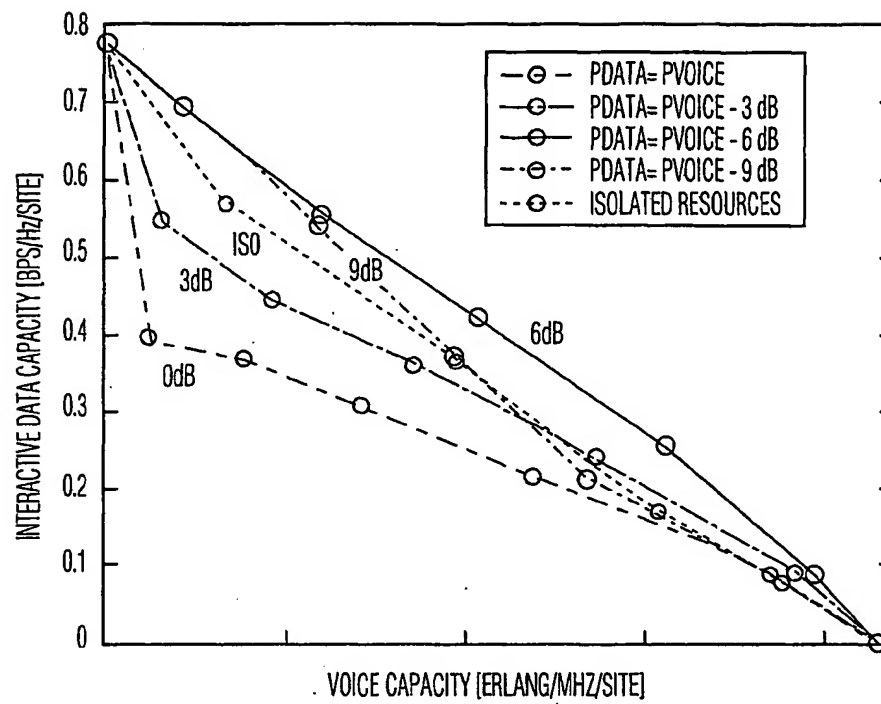


FIG. 5

INTERNATIONAL SEARCH REPORT

 Internati Application No
 PCT/SE 02/00048

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04B7/005

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	W W S WONG ET AL: "Power Assignment Strategies and Traffic Control for Wireless Multimedia DS-CDMA Systems" SEVENTH IEEE INTERNATIONAL SYMPOSIUM ON PERSONAL, INDOOR AND MOBILE RADIO COMMUNICATIONS. PIMRC' 96. TAPEI, TAIWAN. PROCEEDINGS OF PIMRC' 96, vol. 1, 15 October 1996 (1996-10-15), pages 188-192, XP002180407 new-york (us) page 189, right-hand column, line 3 -page 191, left-hand column, line IV. page 188, paragraph I. --- -/-	1,2,27, 47,48,74

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *A* document member of the same patent family

Date of the actual completion of the international search

17 July 2002

Date of mailing of the international search report

24/07/2002

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Gerling, J.C.J.

INTERNATIONAL SEARCH REPORT

Internatic application No

PCT/SE 02/00048

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 49824 A (NOKIA NETWORKS OY ;NAGHIAN SIAMAEK (FI)) 24 August 2000 (2000-08-24) page 8, line 9 -page 9, line 15 page 6, line 7 -page 7, line 21 page 4, line 9 - line 26	30, 31, 39, 65, 66, 74
A	BERNARDI DE R ET AL: "LOAD CONTROL STRATEGIES FOR MIXED SERVICES IN WCDMA" VTC 2000-SPRING. 2000 IEEE 51ST. VEHICULAR TECHNOLOGY CONFERENCE PROCEEDINGS. TOKYO, JAPAN, MAY 15-18, 2000, IEEE VEHICULAR TECHNOLGY CONFERENCE, NEW YORK, NY: IEEE, US, vol. 2 OF 3. CONF. 51, 15 May 2000 (2000-05-15), pages 825-829, XP000967985 ISBN: 0-7803-5719-1	

INTERNATIONAL SEARCH REPORT

information on patent family members

Internat Application No
PCT/SE 02/00048

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0049824	A	24-08-2000	FI 990312 A	17-08-2000
			AU 2674800 A	04-09-2000
			BR 0008264 A	06-11-2001
			CN 1340279 T	13-03-2002
			EP 1153518 A1	14-11-2001
			WO 0049824 A1	24-08-2000

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.